

INSTRUCTION MANUAL

MC1-10/20 10/20 Channel Module Case



8626 Wilbur Avenue
Northridge, California 91324-4498
(818) 886-2057 • Telex 65-1303
TOLL FREE (800) 423-5851 (AK/CA use (818) number)
AUTOMATIC FAX (818) 886-6512

TABLE OF CONTENTS

SECTION

PAGE_NO.

I	DESCRIPTION	1-1
1-1	Introduction	1-1
1-3	Model Identification	1-1
1-5	Physical Description	1-1
1-9	Functional Description	1-3
1-14	Technical Characteristics	1-3
II	INSTALLATION AND OPERATION	2-1
2-1	Mounting Procedure	2-1
2-3	Electrical Power Connections	2-1
2-6	Plug-In Module Installation	2-1
2-11	Input/Output Connections	2-2
2-13	Operating Procedure	2-2
III	THEORY OF OPERATION	3-1
3-1	DC Power Supply	3-1
3-7	Carrier Supply	3-1
IV	MAINTENANCE AND REPAIR	4-1
V.	MC1 SYSTEM ACCESSORIES	5-1

LIST OF ILLUSTRATIONS

<u>FIGURE_NO.</u>		<u>PAGE_NO.</u>
1-1	MC1-10 Module Case	iv
1-2	MC1-20 Module Case	iv
2-1	Internal Connector Wiring Diagram . .	2-3

LIST OF TABLES

<u>TABLE_NO.</u>		<u>PAGE_NO.</u>
1-1	Technical Specifications	1-4

LIST OF DRAWINGS

<u>DRAWING_NO.</u>		<u>PAGE_NO.</u>
11542	MC1-10/20 DC Voltage and Carrier Supplies, Schematic Diagram	
11538	MC1-10/20 Rectifier/Filter, Schematic Diagram	

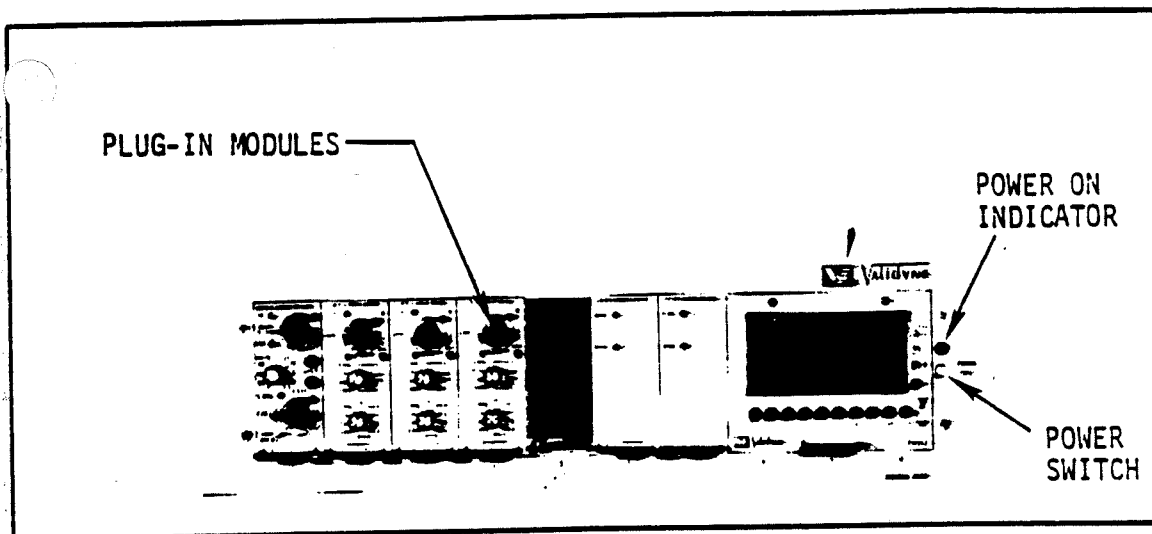


Figure 1-1. MC1-10 Module Case (shown with PM212 installed).

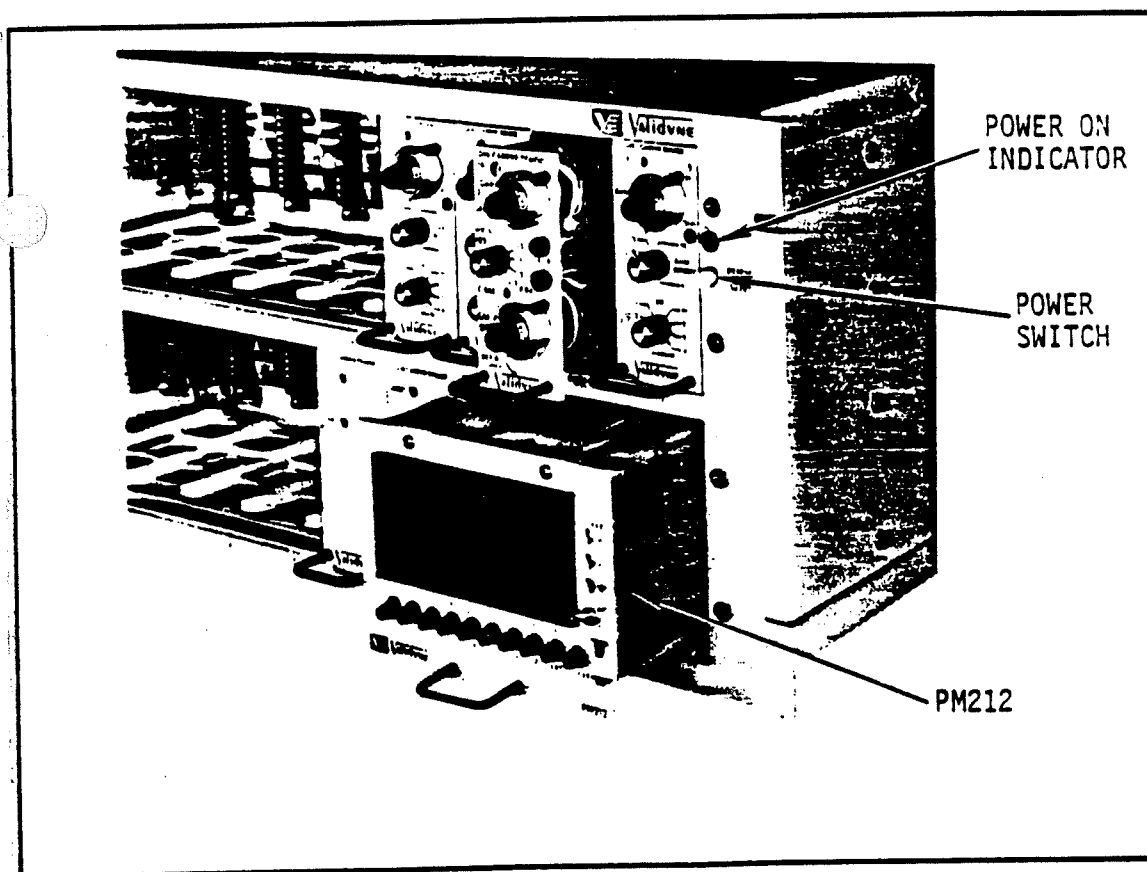


Figure 1-2. MC1-20 Module Case (shown with PM212 partially installed).

SECTION I DESCRIPTION

1-1 INTRODUCTION

1-2 This technical manual contains installation and operating instructions for the MC1-10 and MC1-20 Cases, manufactured by Validyne Engineering Corporation, Northridge, California.

1-3 MODEL IDENTIFICATION

1-4 All MC1 module cases are identified by a part number which designates the various options specified by the customer. The following identification system is used:

MODEL MC1 - 10 - P - 1 - A - X

NO. OF CHANNELS

10 Ten
20 Twenty

INPUT/OUTPUT CONNECTORS

P PT02/XLR (STD)
T Terminal Strips
W WK4/XLR

OPERATING VOLTAGE

1 110 Vac (STD)
2 220 Vac

CARRIER FREQUENCY

A 3 KHz (STD)
B 5 KHz
C 10 KHz
D 20 KHz

SPECIAL MODIFICATIONS

4-digit Number

1-5 PHYSICAL DESCRIPTION

1-6 The MC1-18/28 is an all metal constructed case, designed for installation in standard 19-inch relay racks, for use in data acquisition and control systems. The MC1-18 is designed to accept up to 18 modules while the MC1-28 is approximately double in height and will accept up to 28 modules. Plug-in modules are inserted through an opening in the panel of the module case. The only controls and indicators for the MC1-18/28 are a power switch (PUSH ON), and a power "on" indicator located on the front panel.

1-7 The rear of the case contains the power input socket, transducer input and output connectors, and a circuit breaker.

1-8 Deleted

1-9 FUNCTIONAL DESCRIPTION

1-10 The DC supply for all channels is ± 15 Vdc, with good regulation. The regulator is short circuit proof.

1-11 The carrier supply is a distortion-free Wien-bridge oscillator in a closely controlled feedback loop which guarantees constant output at the plug-in terminals. The standard frequency is 3 KHz, with 5, 10, and 20 KHz available on special order.

1-12 The oscillator can be synchronized to another MC1 Module Case by specifying (-530) option.

1-13 Deleted

1-14 TECHNICAL CHARACTERISTICS

1-15 The specifications for the MC1-10 and MC1-20 Module Cases are listed in Table 1-1.

TABLE 1-1
TECHNICAL SPECIFICATIONS

ITEM	CHARACTERISTICS
<u>ELECTRICAL</u>	
Power Input:	117/234 Vac, 50-400 Hz
Power Consumption:	150 VA Maximum
Protection:	2 Amp circuit breaker, rear panel mounted
<u>DC POWER SUPPLY</u>	
Voltage, Rated:	± 15 Vdc, tracking
Line Regulation:	$\pm 0.05\%$, 105-130 Vac
Load Regulation:	$\pm 0.10\%$, 0-3 Adc
Temperature Regulation:	$\pm 0.01\%$ / $^{\circ}$ F, 0-160 $^{\circ}$ F
Power, Rated:	
MC1-10:	30 watts
MC1-20:	60 watts
Supply Protection:	Overload and short circuit proof with foldback limiting and auto-recovery

TABLE 1-1
TECHNICAL SPECIFICATIONS (continued)

ITEM	CHARACTERISTICS	
<u>CARRIER POWER SUPPLY</u>		
Voltage:	5 Vac, rms, sine wave	
Power:	10 VA maximum	
Frequency:	3 KHz unless otherwise specified; 5 KHz, 10 KHz, 20 KHz available.	
Regulation:	Amplitude	Frequency
Line, 105-130 Vac:	±0.05%	±0.01%
Load, 0-10 VA:	±0.15%	±0.10%
Temperature, 0-160 F:	±0.01%/ F	±0.006%/ F
<u>ELECTRICAL CONNECTIONS</u>		
Transducer Input:	Bendix PT02A-10-6P, 1/channel, mating connector PT06-10-6S, or equal; Cannon WK4-32S available	
Output:	Cannon XLR-3-32S, 2/channel, mating connector XLR-3-11C or equal; 14-Pin IDC Header(s)	
Power:	3-wire socket, rear panel, (6 foot line cord furnished)	
<u>MECHANICAL</u>		
Size		
MC1-10:	5 1/4"H x 19"W x 12"D Standard rack mount (13.3 cm x 48.2 cm x 30.2 cm)	
MC1-20:	8 3/4"H x 19"W x 12"D Standard rack mount (22.2 cm x 48.2 cm x 30.2 cm)	
Weight		
MC1-10	20 lbs. Avdp (9.1 kg)	
MC1-20	22 lbs. Avdp (10.0 kg)	

SECTION II
INSTALLATION AND OPERATION

1 MOUNTING PROCEDURE

2-2 The MC1-10/20 can be either rack mounted, or used as is on a bench. For rack mounting, all that is required for installation is to secure the Module Case to a standard 19-inch rack with four screws.

2-3 ELECTRICAL POWER CONNECTIONS

2-4 The power cord is packed separately. Connect the power cord to the rear of the Module Case and to the specified power source.

2-5 Press the front panel power switch. The adjacent red pilot light should light, indicating that the ± 15 V supply is operating properly.

N O T E

THE DC AND CARRIER SUPPLIES WILL STABILIZE AND BE READY FOR OPERATION WITHIN SECONDS OF TURN-ON.

2-6 PLUG-IN MODULE INSTALLATION

2-7 Install the selected plug-in modules in the Module Case. Be sure that the modules are fully seated to insure good electrical connections. All modules may be installed or removed

with the power "on" without damage to the modules or power supplies, and without effect on adjacent channels. Instructions for operation of individual modules are contained in separate manuals which are shipped with the modules. A description of available plug-in modules can be found in Section V and in the MCI Systems Brochure.

2-8 Deleted

2-9 Deleted

2-10 Deleted

2-11 INPUT/OUTPUT CONNECTIONS

2-12 All transducer input and electrical output connections are made at the rear of the Module Case. Figure 2-1 is the internal connector wiring diagram for the Module Case. The 14-pin terminal headers (one on the MCI-10, two on the MCI-20) allow convenient ribbon-cable connection of the "A" outputs to the model DA380 Intelligent Data Acquisition System.

2-13 OPERATING PROCEDURES

2-14 The only operating procedures required after installation of the plug-in modules, transducers, and monitoring equipment is to turn power "on". This is accomplished by pressing the button on the front of the Module Case and noting that the red light comes on. Individual instructions for each module are contained in separate manuals.

2-15 The Module Case is all solid-state, and no warmup is required for the case itself. Some warmup, however, may be required for specified performance of plug-ins. Consult the manual for each particular plug-in for this information.

2-16 Power dissipated in the module case is nominal, and does not require ventilation for specification performance. An electrostatic shield is incorporated to insure low noise operation in all installations.

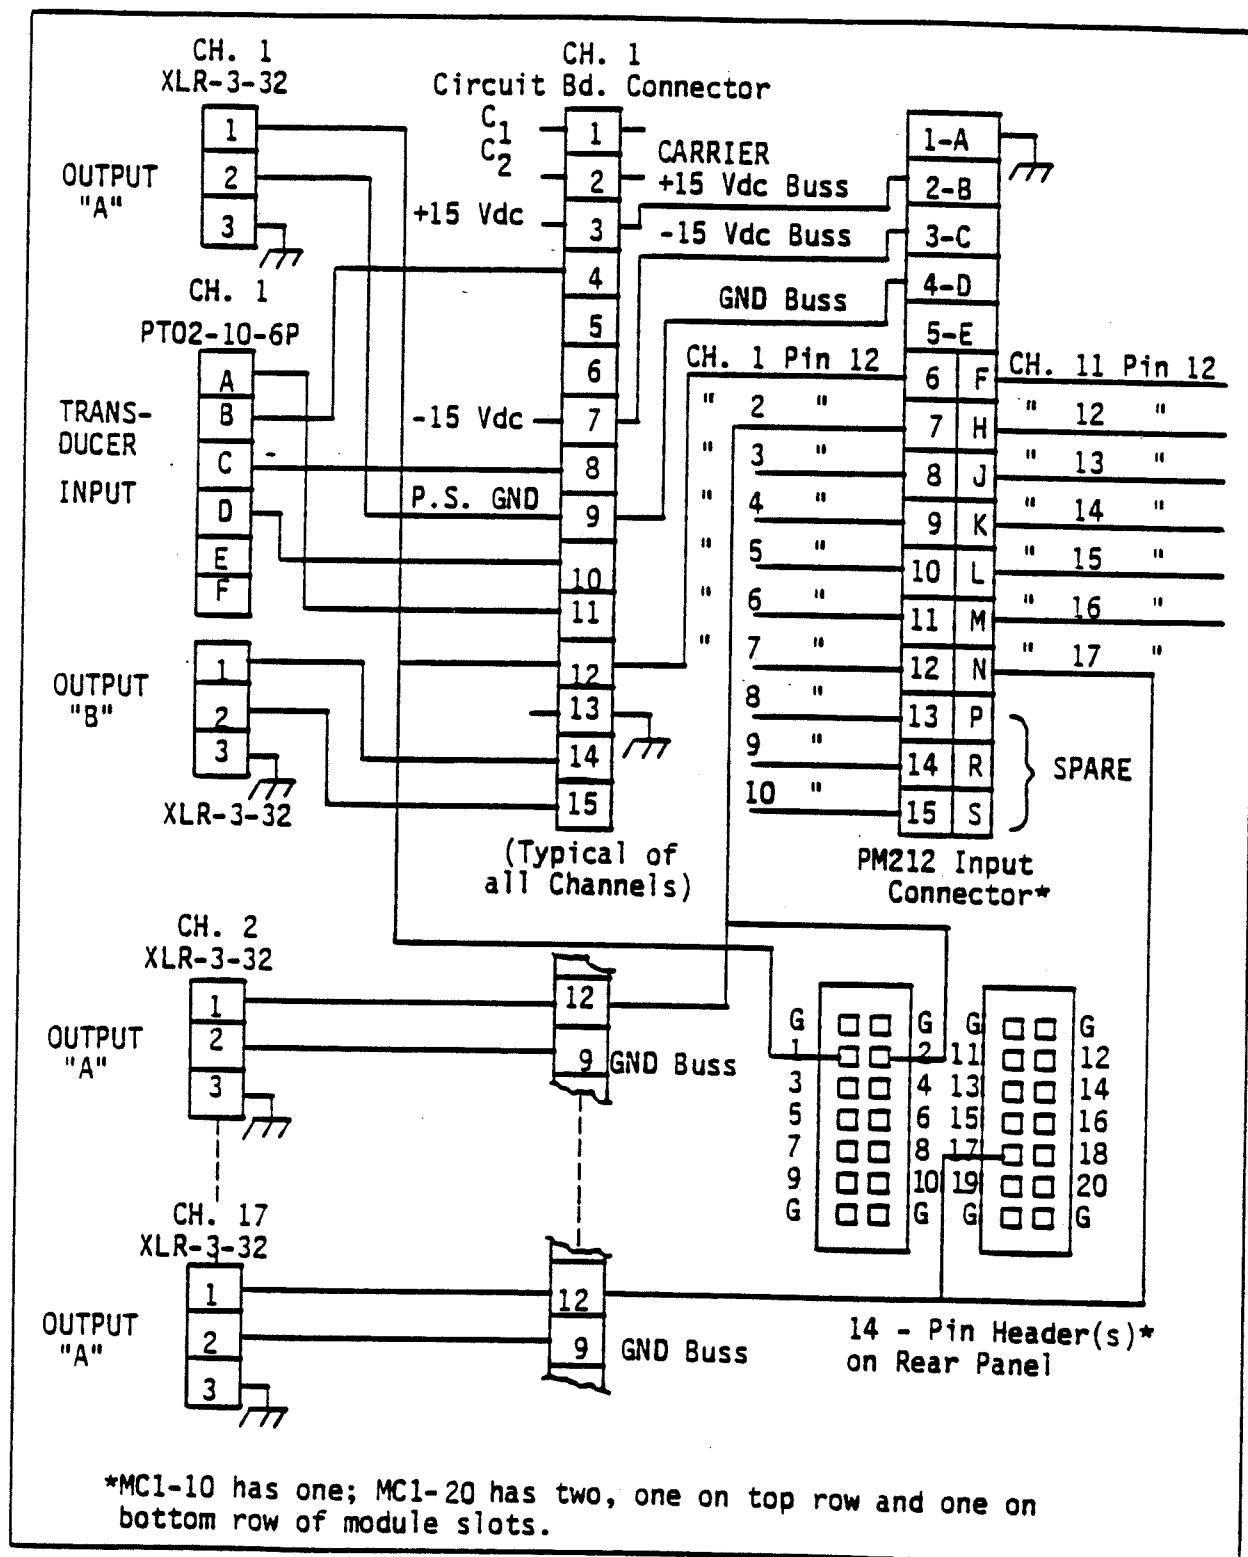


Figure 2-1
Internal Connector Wiring Diagram

3-1 DC POWER SUPPLY

3-2 The DC power supply is rated to deliver regulated ± 15 Vdc to the carrier supply and the plug-in modules.

3-3 Deleted

3-4 Temperature rise on the heat-sink is nominal. If the system is subjected to heavy load and simultaneous high ambient temperature, a pair of transistors thermally connected to the heat-sink will shut down the supply until it cools. This occurs at a heat-sink temperature of approximately 100°C , and protects the components from damage.

3-5 The front panel light is an LED (Light Emitting Diode) connected to indicate the presence of the + and -15 V power supplies. An E.M.I. filter is built-in at the receptacle to prevent line noise from reaching the plug-in modules.

3-6 The schematic diagram of the MC1-10/20 DC Voltage and Carrier supply is shown in Drawing 11542. The rectifier/filter schematic is shown in Drawing 11538.

3-7 CARRIER SUPPLY

3-8 The carrier oscillator is a Wien-bridge type operating at 3 KHz. Carrier frequencies of 3 KHz, 10 KHz, or 20 KHz are available on special order.

3-9 The output amplifier is a complementary symmetry circuit capable of delivering 10 VA. The amplifier drives an output transformer with a precision center-tapped secondary. The AC output is fed back to a bridge rectifier. The bridge output is compared to a DC reference, and the integrated error signal is used to control output amplitude through an FET transistor. The oscillator and integrator use a dual monolithic wideband operational amplifier which ensures good amplitude control over the temperature range.

3-10 In the event of a power overload or short circuit, the oscillator will shut down, and recover automatically when the overload is removed.

Validyne Products, as a function of their basic design, do not require periodic re-calibration or maintenance, as such. If abnormalities in performance occur which cannot be corrected by adjustment procedures, the unit should be returned to the factory, transportation PRE-PAID, for evaluation and repair.

Turn-around time will be improved when, along with a brief statement about the malfunctions or performance degradation, information regarding purchase order data and number are enclosed with the instrument.

An estimate of repair costs, if requested, will be provided prior to commencement of work.

Warranty repairs will be handled as outlined in Validyne Engineering Corporation's Warranty Policy contained in the front of this manual.

Address all shipments and correspondence regarding returned units to:

Validyne Engineering Corporation
8626 Wilbur Avenue
Northridge, CA 91324

Attention: Customer Service Department

GENERAL PURPOSE PLUG-INS

(See MC1 System Brochure for a detailed listing of functional plug-ins)

NI157 Plug-in Null Indicator

Used as an AC Null Indicator to aid in adjustment of AC Signal Zero Balance when using the CD19 or CD90 High-Gain Carrier Demodulator.

UPF162 Plug-in Low Pass Filter

A unity-gain low pass filter for 0 to ± 10 V DC outputs of signal conditioning modules; switch-selectable time constants of 0.1, 0.2, 0.5, 1, 2, 5, 10, 20, 50, 100, 200 & 500 seconds.

AD136 Plug-in Peak-Hold/Auto-Zero Module

In the Peak-Hold Mode, will track 0-10V DC input and hold peak until reset; in the Auto-Zero Mode, will automatically establish new zero reference for output upon command; reset is accomplished via front panel switch or remote contact closure.

ANALOG/DIGITAL READOUTS

PM118 Plug-in Analog Meter (for MC1-3, MC1-10, & MC1-20)

Vertical panel meter mounted on plug-in module; reads ± 10 V DC with center zero; connects to output of signal conditioning module via MC1 rear connectors (single channel readout).

MC24 Plug-in Analog Meter (for MC1-10 and MC1-20)

Vertical panel meter which plugs into Channel 10 (or -20) of the MC1-10 (or -20) for switch-selectable readout of nine (or 19) channels; reads ± 10 V DC with center zero; connects to outputs of signal-conditioning channels via internal MC1 wiring. Contains range switch for 10X scale expansion and mode switch to select either AC or DC meter operation. Also has external AC and DC inputs.

ANALOG/DIGITAL READOUTS (continued)

PM212-1 Plug-in Digital Meter (for MC1-10 and MC1-20)
3 1/2 digit (1999 max. count) digital readout which plugs into Channels 8, 9, 10 of MC1-10 or 8, 9, 10 or 18, 19, 20 of MC1-20 for switch-selectable readout of up to 17 channels; connects to channel outputs via internal MC1 wiring; accepts 10V AC RMS or DC external inputs via front panel jacks; user-programmable decimal point for each channel.

PM212-2 Plug-in Digital Panel Meter
Same as PM212-1 except 4 1/2 digits (19999 max. count).

MISCELLANEOUS ACCESSORIES

P/N 7273 Blank Panel
Used just to fill in the panel space of an empty channel.

P/N 7616-2 Plug-In Module Connection Extender
Allows plug-in modules to be checked for adjustments made outside of the MC1 module case. Consists of a PC plug-in board and a 20-inch cable with a PC board mating connector on the end.

P/N 8050-1 Blank Plug-In Module
A complete blank plug-in module with blank PC board. PC board contains no plating except for PC connector pads.

P/N 8050-2 Blank Plug-In Module
Same as -1, except copper-clad board for customer custom PC design.

P/N 8542-2 Module Interconnect Cable (Output to Output)
Standard 2-foot cable with XLR-3-11C Connector on both ends; used to connect output of one channel to output connector of any other channel (used with AL64, PM118, etc.).


P/N 8573-2 Module Interconnect Cable (Input to Output)
Standard 2-foot cable with PT06-10-63 Connector on one end and XLR-3-11C on other end; used to connect output of one module to input of another—e.g., CD18 to AD136.

P/N 2975 AC Power Cord
-7501

MISCELLANEOUS ACCESSORIES (continued)

MC1 Mating Connector Sets:

PN 11681 Set of 10 PT06-10-63 Input and 20 XLR-3-11C Output.
For MC1-10. Order two sets for MC1-20

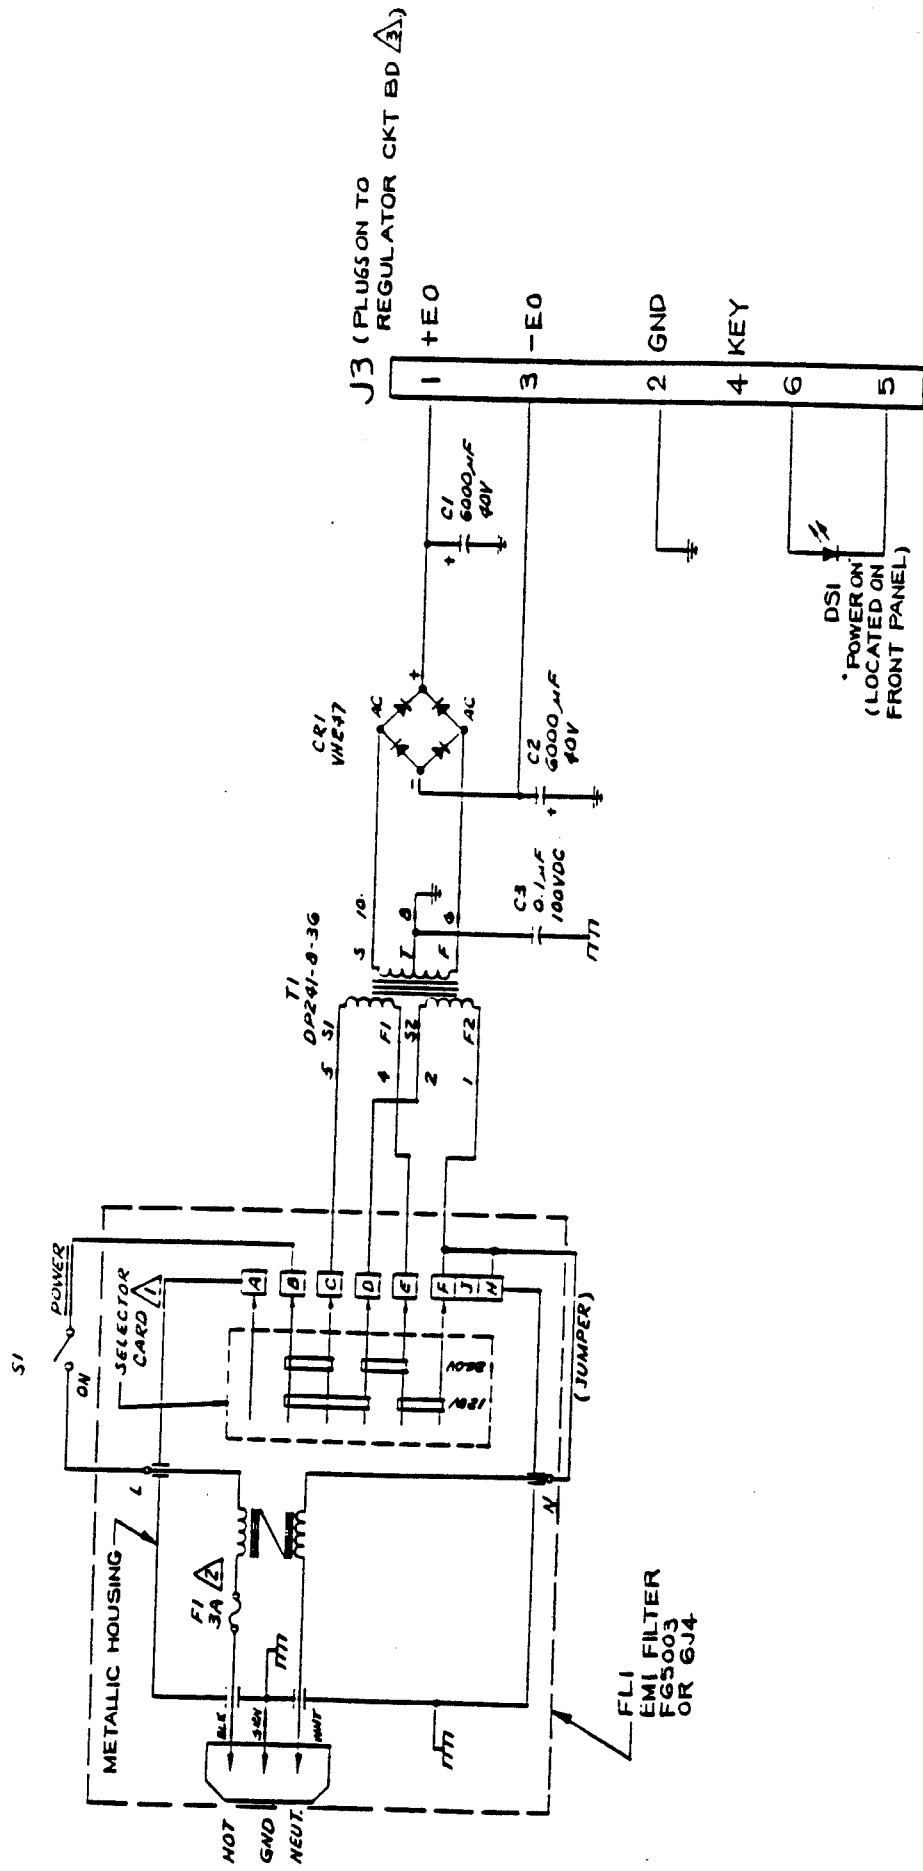


HIGHEST REF DES USED									
FLI	F1	C3	T1	CR1	DS1	SI			
REF DES NOT USED									

- REGULATOR SCHEMATIC 11542.
- FOR 250WAC USE 1.5A FUSE.
- USE ONLY 120VAC OR 250WAC POSITIONS OF EMI FILTER SELECTOR CARD AS APPLICABLE.

NOTES: UNLESS OTHERWISE SPECIFIED

CARRIER DEMODULATOR
PLUG-IN TYPE

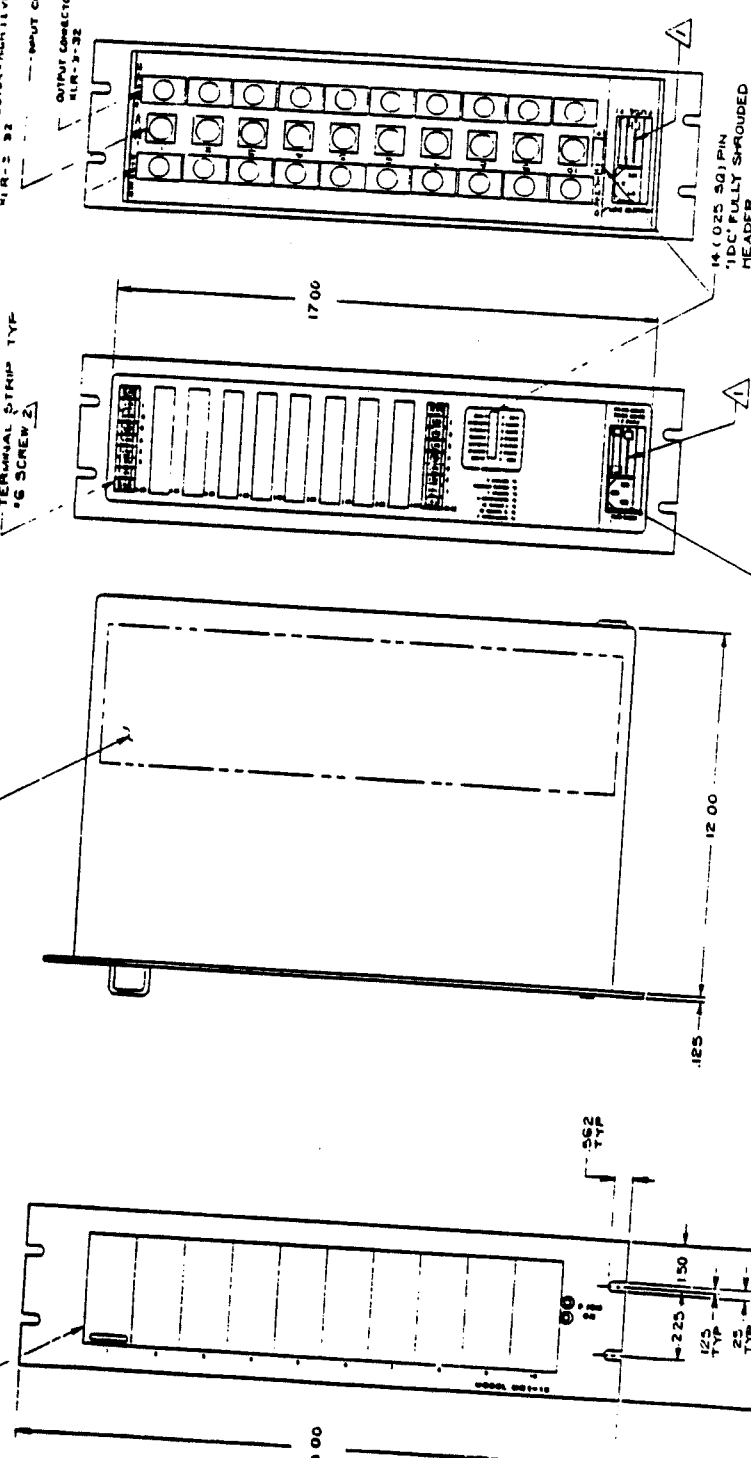

AC POWER INPUT CONNECTOR -
3 PIN
MATE TYPE, CEE 22 FORM 6
8' LONG, GROUND POWER CORD
PROVIDED, BELDEN - 17501 OR EQUIV

T OPTION 2

P or W OPTION 2
 $\left(\begin{array}{l} P = \text{PT02} \\ W = \text{WK-4} \end{array} \right)$

14 (025 SQ) PIN
'1DC' FULLY SHROUDED
HEADER

MC1 MODULE CASES

1" OPTION

OPTION {

NOTION

OPTIONAL

OPTION $\left\{ \begin{array}{l} \text{---} \\ \text{---} \end{array} \right\}$

WIRING TABLE -

WIRING TABLE -		USED FOR	
1	1	EXCITATION +	SIGNAL A
2	2	EXCITATION -	SIGNAL IN
3	3	OUTPUT A	SIGNAL GROUND
4	4	OUTPUT B	CHASSIS GROUND

2. SEE TABLE FOR WIRING

FOR 230 VOLT OPTION REPLACE 3 0 AMP FUSE WITH 15 AMP VORN 2566-1500 AND REVERSE THE VOLTAGE SELECTOR CARD SO THAT CONNECT VOLTAGE IS READABLE WHEN INSTALLED


NOTES: 1. UNLESS OTHERWISE SPECIFIED

CODE POINT NO
33107

[illegible]

11542

REV	DATE	BY	CHKD	DESCRIPTION
1	11/5/42	W. J. B.	W. J. B.	INITIAL DESIGN
2	11/10/42	W. J. B.	W. J. B.	REVISED CIRCUIT
3	11/15/42	W. J. B.	W. J. B.	REVISED CIRCUIT

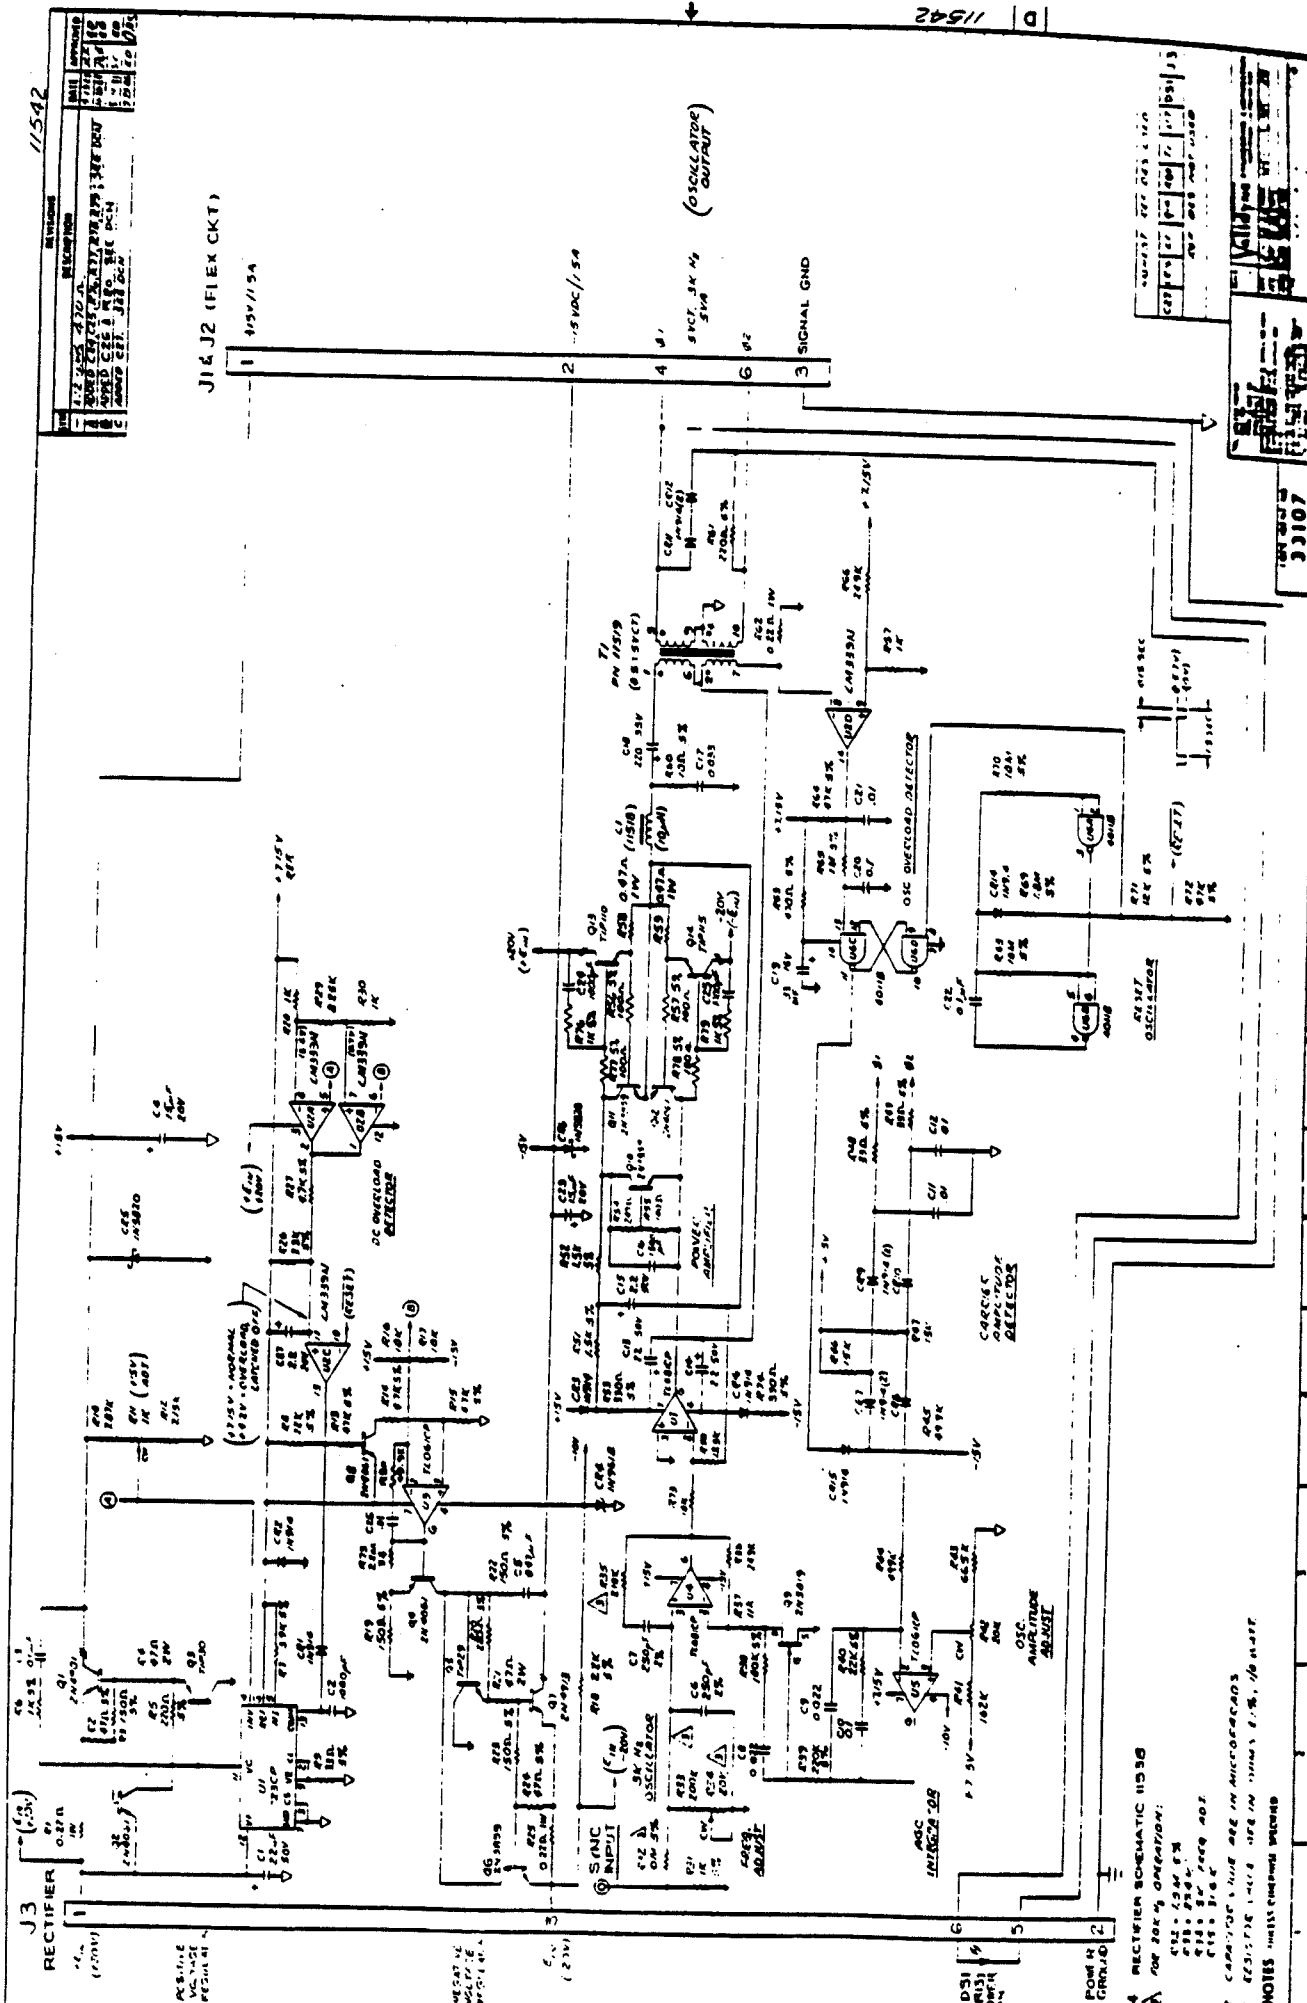

4 RECTIFIER SCHEMATIC 11536
FOR 20% OPERATION:
C12 = 100K 5%
C13 = 100K 5%
C14 = 100K 5%
C15 = 100K 5%
C16 = 100K 5%
C17 = 100K 5%
C18 = 100K 5%
C19 = 100K 5%
C20 = 100K 5%
C21 = 100K 5%
C22 = 100K 5%
C23 = 100K 5%
C24 = 100K 5%
C25 = 100K 5%
C26 = 100K 5%
C27 = 100K 5%
C28 = 100K 5%
C29 = 100K 5%
C30 = 100K 5%
C31 = 100K 5%
C32 = 100K 5%
C33 = 100K 5%
C34 = 100K 5%
C35 = 100K 5%
C36 = 100K 5%
C37 = 100K 5%
C38 = 100K 5%
C39 = 100K 5%
C40 = 100K 5%
C41 = 100K 5%
C42 = 100K 5%
C43 = 100K 5%
C44 = 100K 5%
C45 = 100K 5%
C46 = 100K 5%
C47 = 100K 5%
C48 = 100K 5%
C49 = 100K 5%
C50 = 100K 5%
C51 = 100K 5%
C52 = 100K 5%
C53 = 100K 5%
C54 = 100K 5%
C55 = 100K 5%
C56 = 100K 5%
C57 = 100K 5%
C58 = 100K 5%
C59 = 100K 5%
C60 = 100K 5%
C61 = 100K 5%
C62 = 100K 5%
C63 = 100K 5%
C64 = 100K 5%
C65 = 100K 5%
C66 = 100K 5%
C67 = 100K 5%
C68 = 100K 5%
C69 = 100K 5%
C70 = 100K 5%
C71 = 100K 5%
C72 = 100K 5%
C73 = 100K 5%
C74 = 100K 5%
C75 = 100K 5%
C76 = 100K 5%
C77 = 100K 5%
C78 = 100K 5%
C79 = 100K 5%
C80 = 100K 5%
C81 = 100K 5%
C82 = 100K 5%
C83 = 100K 5%
C84 = 100K 5%
C85 = 100K 5%
C86 = 100K 5%
C87 = 100K 5%
C88 = 100K 5%
C89 = 100K 5%
C90 = 100K 5%
C91 = 100K 5%
C92 = 100K 5%
C93 = 100K 5%
C94 = 100K 5%
C95 = 100K 5%
C96 = 100K 5%
C97 = 100K 5%
C98 = 100K 5%
C99 = 100K 5%
C100 = 100K 5%

MC1-20


REVISIONS	DESCRIPTION	DATE APPROVED
1	ADDED OPTIONS SEE DCH	17/12/22

CARRIER DEMODULATOR
PLUG-IN TYPE

POWER SUPPLY
SECTION

TERMINAL STRIP TYPE
"C" SCREW

OUTPUT CONNECTOR - HIGH LEVEL
KLN-3-32
INPUT CONNECTOR - LOW LEVEL
KLN-3-32

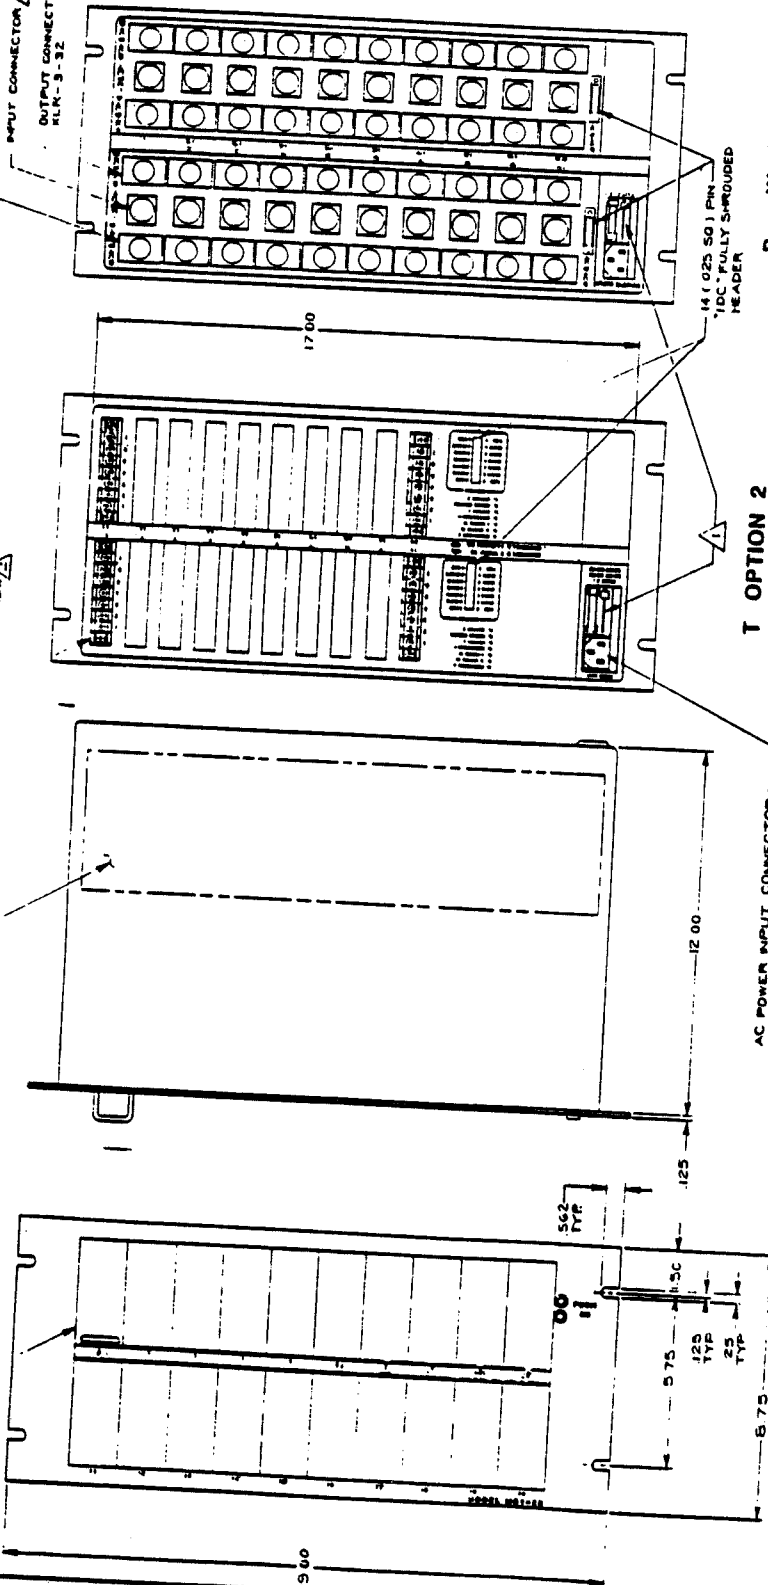

AC POWER INPUT CONNECTOR.
MATE TYPE, CEE 22 FORM 6
8' LONG, GROUND POWER CORD
PROVIDED, BELDEN-17501 OR EQUIV

T OPTION 2
(T-TERMINAL STRIP)

P or W OPTION 2
(P = PTO2
W = WK-4)

MCI MODULE CASES	
1 ST OPTION	NUMBER OF CHANNELS 1 101 2 102 3 103 4 104 5 105 6 106 7 107 8 108 9 109 10 110 11 111 12 112 13 113 14 114 15 115 16 116 17 117 18 118 19 119 20 120
2 ND OPTION	CONNECTIONS P 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 W 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20
3 RD OPTION	INPUT VOLTAGE 1 115 VAC (STD) 2 230 VAC
4 TH OPTION	CARRIER FREQUENCY 1 300 KHz (STD) 2 315 KHz 3 330 KHz 4 345 KHz 5 360 KHz
5 TH OPTION	CHASSIS STYLE X MOD 3 STYLE

WIRING TABLE -

USED FOR	
EXCITATION +	1
SIGNAL IN	2
EXCITATION -	3
OUTPUT A	4
SIGNAL GROUND	5
OUTPUT B	6
CHASSIS GROUND	7

SEE TABLE FOR WIRING.
FOR 220 VOLT OPTION REPLACE 3.0 AMP FUSE WITH 1.5 AMP
VFN 2258-1000 AND REVERSE THE VOLTAGE SELECTOR CARD
SO THAT CORRECT VOLTAGE IS READABLE WHEN INSTALLED
NOTES UNLESS OTHERWISE SPECIFIED

CODE 33107

1.06	VALIDITY	ENCLOSURE CONNECTION
1.07	DATE	17/12/22
1.08	BY	MC1-20
1.09	OUTLINE DRAWING	CARRIER DEMODULATOR SYSTEM

MC1-20

WARRANTY

VALIDYNE ENGINEERING CORPORATION warrants equipment of its own manufacture to be free from defects in material and workmanship under normal conditions of use and service.

VALIDYNE will rework or replace any defective item returned to VALIDYNE within its warranty period as specified below:

1. Pressure Transducers and Pressure Transmitters (including transducers supplied as part of Digital Manometer Systems) within three (3) years of its original purchase.
2. Electronics products (Transducer Indicators, Carrier Demodulators, plug-in Signal Conditioners, Module Cases, etc.) within one (1) year of its original purchase.
3. OEM Transducers within one (1) year of its original purchase.

Buyer is requested to secure authorization of VALIDYNE and to describe defect prior to return of equipment under warranty. Shipment to VALIDYNE shall be at Buyer's expense, with return at VALIDYNE's expense. NON-VERIFIED problems or malfunctions, whether warranty or not, are subject to an \$80.00 evaluation charge.

The warranty carries no liability, either expressed or implied, beyond our obligation to the original purchaser to rework or replace, at VALIDYNE's option, the unit which carries the warranty. Prices, specifications, and designs are subject to change without notice. This warranty is void if the product is subjected to misuse, accident, neglect, or improper application or operation.

Out of Warranty Rework

Units returned to VALIDYNE for rework which are out of warranty will be subject to the following conditions:

1. A description of the problem or malfunction shall accompany the unit returned for rework or be communicated to VALIDYNE prior to shipment. Otherwise there will be a minimum evaluation and/or calibration charge of \$80.00.
2. Unit will be reworked automatically if charge is less than 65% of current list price unless other specific instructions are received. Above 65% VALIDYNE will request authorization by Buyer.
3. If quotation is required before proceeding with rework, unit should be accompanied by a document so stating or information communicated to VALIDYNE prior to shipment. An \$80.00 evaluation charge will be invoiced for this service.
4. Buyer is to secure authorization and shipping method from VALIDYNE prior to return of equipment or shipment will be rejected. (Applies to Canada only)
5. Shipping charges in both directions are the responsibility of the Buyer for all out of warranty returns.

Warranty on Rework

Warranty coverage on rework is 90 days on work done or to the end of the original warranty period, whichever is longest.



8626 Wilbur Ave. • Northridge, CA 91324 • (818) 886-2057
AUTOMATIC FAX: (818) 886-6512 • TOLL FREE: (800) 423-5851